

EFX5-351

ELECTRIC COUNTERBALANCE FORKLIFT TRUCK 3.5T

 3500 kg  6000 mm  80 V Li-Ion




The X5 Series is ideal for medium to heavy-duty operations, from manufacturing and construction to logistics centers and outdoor yards. Its pneumatic tires, 150 mm ground clearance, and sealed electrical components enable smooth, safe operation even on uneven or unpaved surfaces. The modular Li-ion battery system allows companies to expand energy capacity from 280Ah to 560Ah, adapting to single-shift, multi-shift, or seasonal high-demand applications without changing the truck setup.

SPECIFICATION	REF	UNIT	VALUE
Manufacturer			EP
Model designation			EFX5-351
Battery voltage		V	80
Rated capacity	Q	kg	3500
Load centre distance	c	mm	500
Service weight		kg	5020
Height, mast lowered	h ₁	mm	2065
Lift	h ₃	mm	3000
Height, mast extended	h ₄	mm	4130
Overall length	l ₁	mm	3824
Overall width	b ₁ /b ₂	mm	1230
Length to face of forks	l ₂	mm	2754
Fork dimensions	s/e/l	mm	50×122×1070
Turning radius	Wa	mm	2498
Drive			Electric
Operator type			Seated

Features

Modular Li-ion battery system for maximum flexibility

The X5 Series introduces a modular battery architecture, allowing operators to install one or two battery modules depending on workload intensity. Each 80V/280Ah unit can be combined to achieve 560Ah total capacity, offering long runtime and seamless power management. This flexibility supports 24/7 operations and makes the X5 adaptable to evolving user needs over time

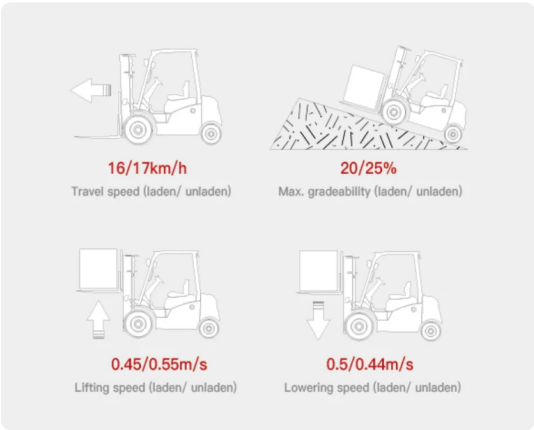

High performance for productivity boost

Delivering travel speeds up to 17 km/h, lifting speeds up to 0.55 m/s, and gradeability up to 25%, the X5 ensures fast, efficient handling comparable to traditional IC forklifts. Its lithium technology guarantees consistent performance and fast recovery through opportunity charging, enabling maximum uptime in fast-paced operations.

All-terrain capability with 150 mm ground clearance

With pneumatic tires and 150 mm ground clearance, the X5 Series effortlessly manages ramps, potholes, and rough surfaces. The robust undercarriage prevents chassis damage and ensures reliable mobility across mixed terrains, making it a dependable solution for both warehouse and outdoor logistics.



Operator comfort and improved components

The X5 prioritizes operator safety and comfort with a redesigned cabin, high-visibility mast, ergonomic seat with armrest, wide brake pedal, and large LED display. Enhanced LED front lighting and improved hydraulic controls offer excellent visibility and smooth, precise operation throughout the workday.




VDI Chart

	SPECIFICATION	REF	UNIT	VALUE
1.1	Manufacturer			EP
1.2	Model designation			EFX5-351
1.3	Drive			Electric
1.4	Operator type			Seated
1.5	Rated capacity	Q	kg	3500
1.6	Load centre distance	c	mm	500
1.8	Load distance, centre of drive axle to fork	x	mm	486
1.9	Wheelbase	y	mm	1760
2.1	Service weight		kg	5020
2.2	Axle loading, laden front/rear		kg	7290/1230
2.3	Axle loading, unladen front/rear		kg	1810/3210
3.1	Tyres			Pneumatic
3.2	Tyre size, front		mm	28X9-15-14PR
3.3	Tyre size, rear		mm	6.50-10-10PR
3.5	Wheels, number front/rear (x=drive wheels)			2x/2
3.6	Tread width, front	b ₁₀	mm	1010
3.7	Tread width, rear	b ₁₁	mm	980
4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/10
4.2	Height, mast lowered	h ₁	mm	2065
4.3	Free lift	h ₂	mm	135
4.4	Lift	h ₃	mm	3000
4.5	Height, mast extended	h ₄	mm	4130
4.7	Height of overhead guard (cabin)	h ₆	mm	2160
4.8	Seat height relating to SIP/stand height	h ₇	mm	1095
4.12	Coupling height	h ₁₀	mm	280
4.19	Overall length	l ₁	mm	3824
4.20	Length to face of forks	l ₂	mm	2754
4.21	Overall width	b ₁ /b ₂	mm	1230
4.22	Fork dimensions	s/e/l	mm	50×122×1070
4.23	Fork carriage ISO 2328, class/type A, B			3A
4.24	Fork carriage width		mm	1100
4.31	Ground clearance, laden, below mast		mm	130


SPECIFICATION		REF	UNIT	VALUE
4.32	Ground clearance, centre of wheelbase	m ₂	mm	150
4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	4184
4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	4384
4.35	Turning radius	Wa	mm	2498
5.1	Travel speed, laden/unladen		km/h	16/17
5.2	Lift speed, laden/unladen		m/s	0.44/0.55
5.3	Lowering speed, laden/unladen		m/s	0.5/0.44
5.8	Max. gradeability, laden/unladen		%	18/25
5.10	Service brake			Hydraulic
5.11	Parking brake			Mechanical
6.1	Drive motor rating S2 60 min		kW	16
6.2	Lift motor rating at S3 15%		kW	30
6.4.1	Battery voltage		V	80
6.4.2	Battery nominal capacity K5		Ah	280
6.4.3	Battery type			Li-Ion
6.5	Battery weight		kg	185
6.6	Energy consumption according to DIN EN 16796		kWh/h	9.06
6.7	Turnover output according to VDI 2198			210
6.8	Turnover efficiency according to VDI 2198			29.58
8.1	Type of drive unit			AC
10.1	Operating pressure for attachments		bar	180
10.2	Oil volume for attachments		ℓ/min	35
10.5	Steering design			Hydraulic
10.7	Sound pressure level at the driver's seat		dB(A)	<74

Subject to modification of specifications and designs without prior notice as part of continuous product improvement. Images and technical data shown may include optional features and are provided for reference only. All dimensions are subject to standard manufacturing tolerances.

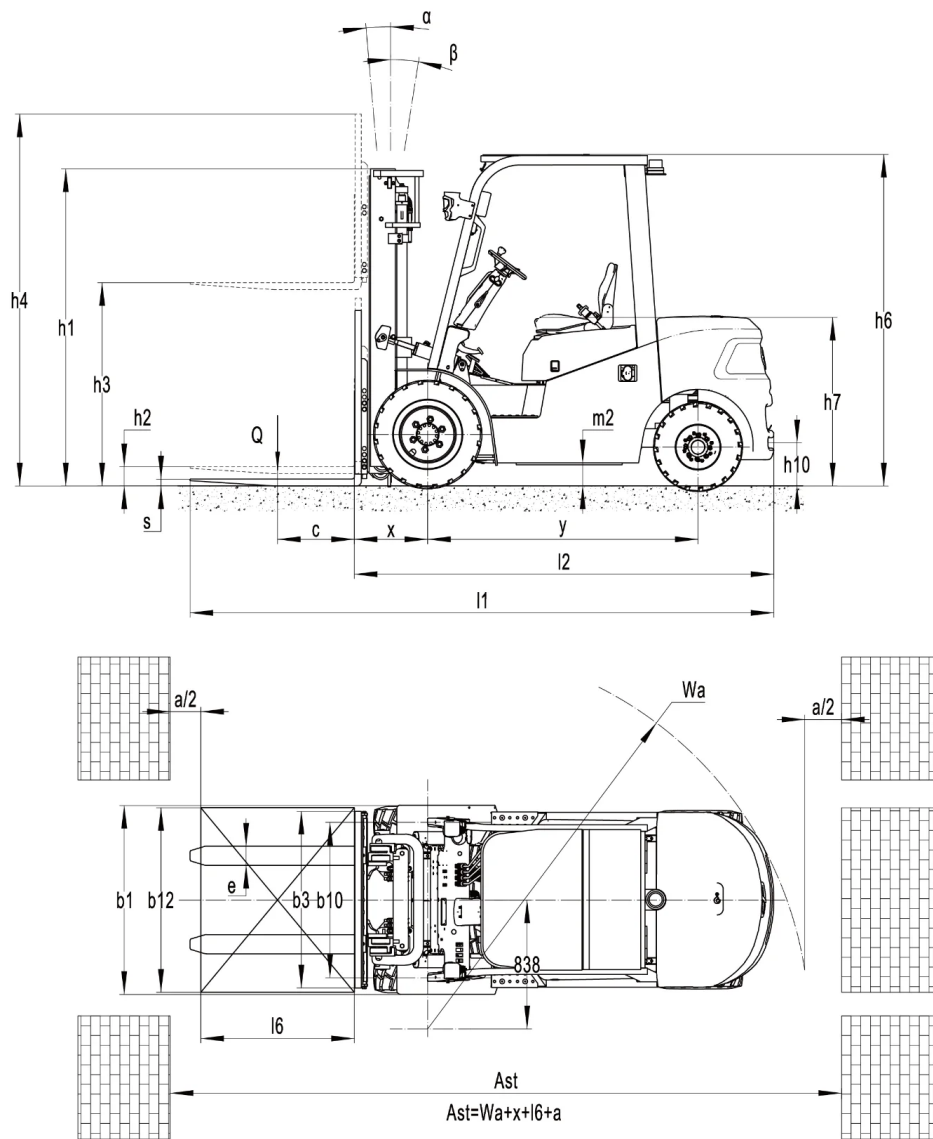

EFX5-351

RATED CAPACITIES AND LOAD CENTERES GRAPH

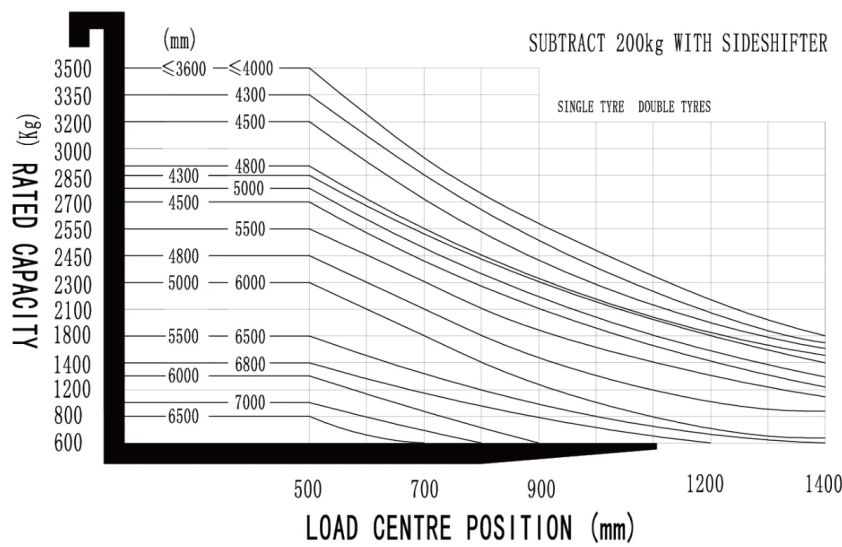

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
2-Standard Mast	3000	2065	3665	4130	135	135
2-Standard Mast	3300	2215	3965	4430	135	135
2-Standard Mast	3500	2315	4165	4630	135	135
2-Standard Mast	3600	2365	4265	4730	135	135
2-Standard Mast	4000	2715	4752	5131	140	140
2-Standard Mast	4500	2965	5257	5636	140	140
2-Standard Mast	5000	3270	5752	6131	140	140
2-Free Mast	3000	2045	3715	4175	1410	950
2-Free Mast	3300	2195	4015	4475	1560	1100
2-Free Mast	3600	2345	4315	4775	1710	1250
3-Free Mast	4300	2085	5030	5435	1395	990

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
3-Free Mast	4500	2165	5220	5625	1475	1070
3-Free Mast	4700	2235	5470	5875	1540	1135
3-Free Mast	4800	2270	5520	5925	1580	1175
3-Free Mast	5000	2355	5720	6125	1665	1260
3-Free Mast	5500	2605	6220	6625	1915	1510
3-Free Mast	6000	2855	6720	7125	2165	1760

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	122*50*1070 122*50*1150 122*50*1220 122*50*1370 122*50*1520 122*50*1600 122*50*1700 122*50*1820 122*50*2000 122*50*2200 122*50*2420
Front wheel material	Pneumatic Normal solid Traceless solid
Rear wheel material	Pneumatic Normal solid Traceless solid
Battery capacity	80V280AH 80V560AH
Charger	80V35A integrated 80V60A integrated 80V60A○80V100A 80V150A 80V200A (560AH)
Battery indicator	With time Bluetooth without PSE
Seat type	Comfortable + safety belt switch Seat with armrest with safety belt swich Suspension + safety belt switch
Attachments	Built-in sideshifter External shifter Fork positioner with sideshift Clamp
Traction pin	Yes and not customized
Electrostatic chain	Yes and not customized
Front lamp	LED
Rear lamp	LED No
Warning lamp	Yes
Steering lamp	LED
Blue lamp	No Rear Front and rear
Area warning lamp	No Both side Both side and rear
Rearview mirror	One in front Two on sides Two on side and one in front

ITEM	OPTIONS (optional items marked in yellow)
Buzzer	Yes and not customized
OPS system	Yes and not customized
USB interface	USB with A and C type
Telematics	Yes and not customized No
Cabin	No Basic half cabin Upgrade half cabin Full cabin
Overhead guard	With tempered glass No
Turn speed control	No
Heating system during lithium battery charging	No Yes and not customized
Operator identification device	No Card reader
Lifting electronic limit	No Yes and not customized
Hydraulic system operating mode	Mechanical lever Joystick Fingertip
Rear armrest horn	Yes and not customized
Wiper water unit	Yes only with cabin