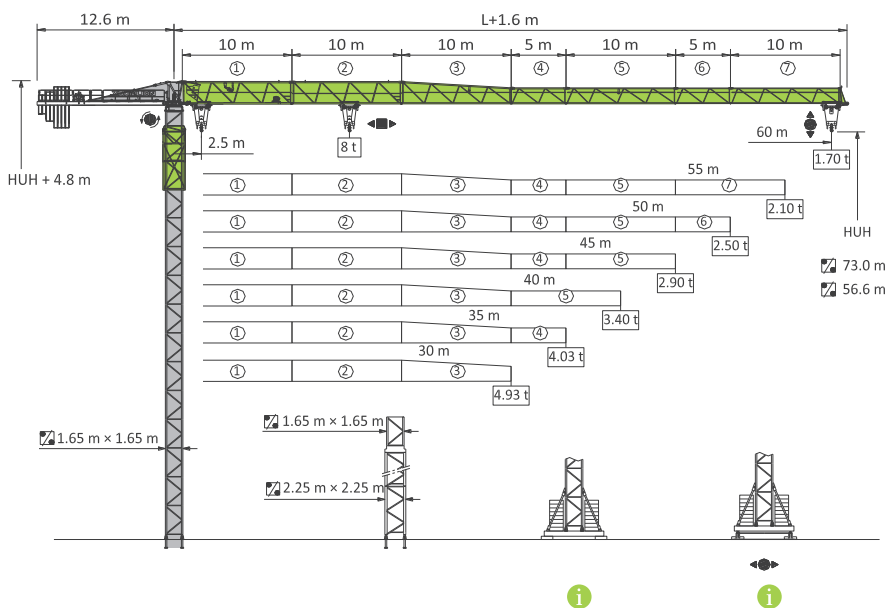
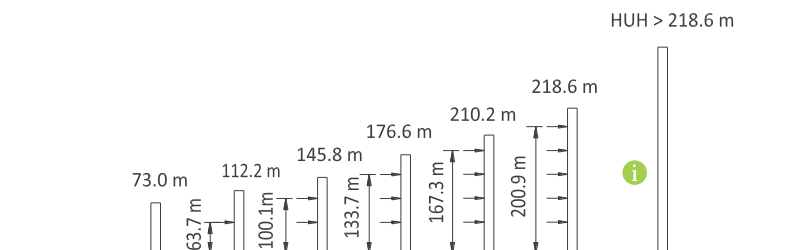
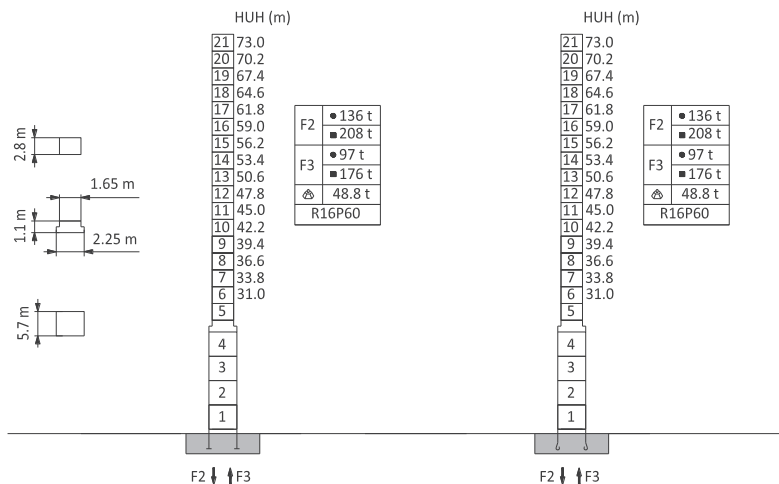


R135-8



Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

1.65m – RA R135-8RAD



起重性能 / Load diagrams / Lastkurven




吊钩—吊钩

吊钩—吊钩 m		m / t	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0
60.0	吊钩	2.5-30.6/4.0	4.00	4.00	4.00	4.00	4.00	4.00	3.73	3.41	3.13	2.89	2.68	2.49	2.33	2.17	2.04	1.92	1.80	1.70
	吊钩	2.5-16.7/8.0	7.56	6.49	5.66	5.01	4.47	4.03	3.66	3.34	3.06	2.82	2.61	2.42	2.26	2.11	1.97	1.85	1.73	1.63
55.0	吊钩	2.5-32.8/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.70	3.40	3.15	2.92	2.72	2.54	2.38	2.23	2.10		
	吊钩	2.5-17.8/8.0	8.00	7.01	6.12	5.42	4.85	4.37	3.97	3.63	3.34	3.08	2.85	2.65	2.47	2.31	2.16	2.03		
50.0	吊钩	2.5-34.1/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.87	3.57	3.30	3.06	2.85	2.67	2.50				
	吊钩	2.5-18.5/8.0	8.00	7.32	6.40	5.67	5.07	4.58	4.16	3.81	3.50	3.23	3.00	2.79	2.60	2.43				
45.0	吊钩	2.5-34.5/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.93	3.62	3.35	3.11	2.90						
	吊钩	2.5-18.7/8.0	8.00	7.43	6.49	5.75	5.15	4.65	4.22	3.86	3.55	3.28	3.04	2.83						
40.0	吊钩	2.5-34.9/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.99	3.67	3.40								
	吊钩	2.5-19.0/8.0	8.00	7.53	6.58	5.83	5.22	4.71	4.29	3.92	3.61	3.33								
35.0	吊钩	2.5-35.0/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00								
	吊钩	2.5-19.4/8.0	8.00	7.72	6.75	5.99	5.36	4.84	4.40	4.03										
30.0	吊钩	2.5-30.0/4.0	4.00	4.00	4.00	4.00	4.00	4.00												
	吊钩	2.5-19.7/8.0	8.00	7.86	6.88	6.09	5.46	4.93												

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz			吊钩		吊钩		kW	
	H30FC20-440A	t	1	4	2	8	30	440 m 
		m/min	100	40	50	20		
	S90CA-180.235LC14/12(M)	r/min	0 - 0.8				9.0	
	T40FC65-b(D)	m/min	0 - 100				4.0	
			43 kW					









Counter-jib ballast / Gegenauslegerballast / 平衡重

高度 m	2.8t	2.0t	1.3t	容量 (t)	PHZ2800F	PHZ2000Q	PHZ1300N
60.0	4	2	2	17.8	 (mm)	 (mm)	 (mm)
55.0	4	2	1	16.5			
50.0	4	1	2	15.8			
45.0	4	1	1	14.5			
40.0	4	1	0	13.2			
35.0	3	2	0	12.4			
30.0	2	2	1	10.9			








Central ballast / Zentralballast / 压重



运输单元 / Dimensions and weight / Abmessungen und Gewicht /

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		11.83	1.27	0.50	2110
起重臂节 Jib section Auslegerelement	 ①	10.25	0.98	2.40	1720
	 ②	10.20	0.98	2.25	1180
	 ③	10.15	0.98	1.61	700
	 ④	10.14	0.98	1.57	500
	 ⑤	10.13	0.98	2.23	890
	 ⑥	5.18	0.98	1.61	410
	 ⑦	5.15	0.98	1.57	280
载重小车 Trolley Laufkatze	 ⑧	0.84	0.98	1.80	80
		2.03	1.67	0.90	280
吊钩 Pulley block Hubflasche		0.93	0.36	1.55	280
司机室 Cabin Kabine		2.08	1.30	2.16	480
起升机构 Hoisting mechanism Hubwerk	 H30FC20-440A	1.78	1.13	0.92	930
变幅机构 Trolleying mechanism Katzfahrwerk	 T40FC65-b(D)	1.12	0.73	0.63	280
回转总成 Slewing assembly Drehteile	 1.65 m	1.65	1.65	3.37	3750

Dimensions and weight / Abmessungen und Gewicht / 运输单元

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		1.65 m - RARg	2.97	2.18	2.22	1310
爬升架 Climbing tower section Kletterturmstück		1.65 m - TC16P60	6.64	2.33	2.14	2710
标准节 Tower section Turmstück		1.65 m - RA	2.97	1.65	1.65	1100
		1.65 m - RAJ	7.67	1.95	1.95	3180
		1.65 m - RAJZ	7.67	1.65	1.65	2920
		2.25 m - RD 2.25 m - RDJZ	2.29 2.29	2.29 2.29	5.87 5.87	2290 2560
		2.25 m - RDJ	5.87	2.56	2.56	2806
支腿 Fixing angles Verankerungsfuss		RD/RA	1.35	2.36	2.36	2820
支腿 Fixing angles Verankerungsfuss		R16P60	1.50	0.36	0.36	4×170

