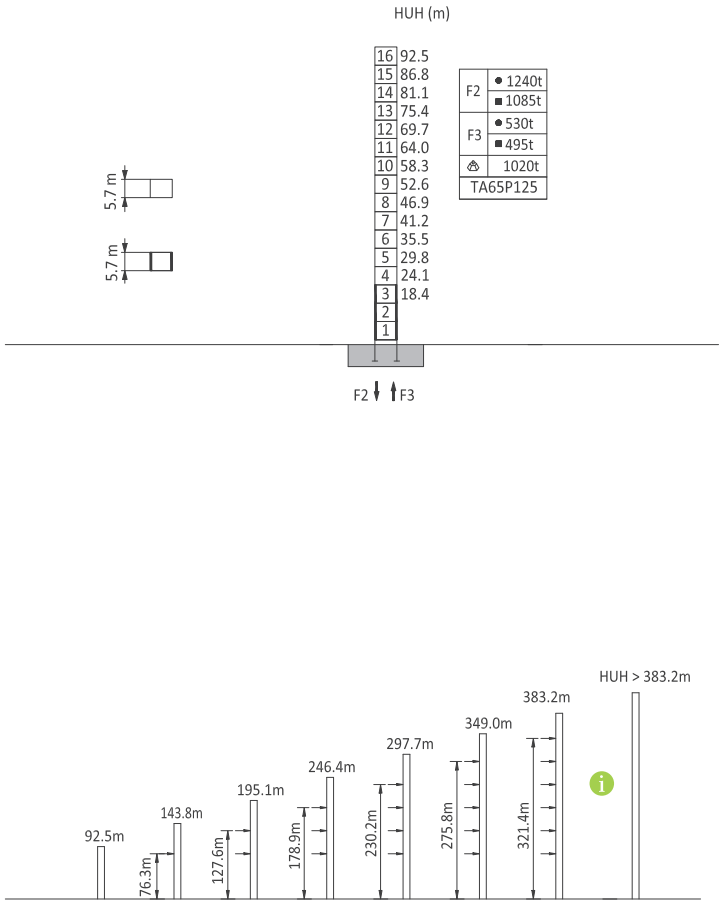




塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

6.5m – ZC R7150-260



Load diagrams / Lastkurven / 起重性能



6060-66-6666

m		m / t	27.5	30.0	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0	62.5	65.0	67.5	70.0		
70.0	6060	9.0-51.6/130.0	130.0										127.5	120.8	114.7	109.2	104.1	99.4	95.0	91.0	
	6666	9.0-48.1/130.0	130.0										124.0	116.6	109.9	103.8	98.2	93.1	88.4	84.1	80.0
	6666	9.0-26.8/260.0	252.5	227.4	188.6	173.3	160.0	148.3	138.1	128.9	120.7	113.3	106.6	100.5	94.9	89.8	85.1	80.8	76.8		
65.0	6060	9.0-53.2/130.0	130.0										125.2	118.9	113.1	107.9	103.0				
	6666	9.0-49.6/130.0	130.0										128.7	121.1	114.2	107.9	102.2	96.9	92.0		
	6666	9.0-27.6/260.0	260.0	235.6	195.5	179.7	166.0	154.0	143.4	133.9	125.5	117.8	110.9	104.6	98.9	93.6	88.8				
60.0	6060	9.0-54.2/130.0	130.0										127.8	121.4	115.5						
	6666	9.0-50.5/130.0	130.0										123.8	116.8	110.4	104.5					
	6666	9.0-28.1/260.0	260.0	240.5	199.7	183.6	169.7	157.4	146.6	137.0	128.3	120.6	113.5	107.1	101.3						
55.0	6060	9.0-55.0/130.0	130.0																		
	6666	9.0-51.3/130.0	130.0										126.2	119.0							
	6666	9.0-28.5/260.0	260.0	244.8	203.3	187.0	172.8	160.3	149.4	139.6	130.8	122.9	115.8								
50.0	6060	9.0-50.0/130.0	130.0																		
	6666	9.0-50.0/130.0	130.0																		
	6666	9.0-28.5/260.0	260.0	244.4	203.0	186.6	172.5	160.1	149.1	139.3	130.6										
45.0	6060	9.0-45.0/130.0	130.0																		
	6666	9.0-45.0/130.0	130.0																		
	6666	9.0-28.5/260.0	260.0	244.4	203.0	186.7	172.5	160.1	149.1												
40.0	6060	9.0-40.0/130.0	130.0																		
	6666	9.0-40.0/130.0	130.0																		
	6666	9.0-28.5/260.0	260.0	244.3	203.0	186.6	172.5														

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz									kW	
	2 x H200FC300-1600D	t	130	65	22	130	65	22	2 x 200	2 x 1600 m 
		m/min	7.5	15	30	15	30	60		
										
		t	260	130	44					
		m/min	7.5	15	30					
	S185CA-350.275CD20/13B x3 S185CN-350.275CD20/13B x1	r/min	0 - 0.6						4 x 18.5	
	T450FC70	m/min	0 - 40						45	
			519 kW							







Counter-jib ballast / Gegenauslegerballast / 平衡重



 m	18.0 t	10.0t	 (t)	PHZ18000	PHZ10000
70.0	8	1	154.0	 (mm)	 (mm)
65.0	8	0	144.0		
60.0	8	0	144.0		
55.0	7	1	136.0		
50.0	7	0	126.0		
45.0	6	1	118.0		
40.0	5	1	100.0		

Central ballast / Zentralballast / 压重






运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		10.80	2.80	3.60	12700
		10.10	2.70	2.50	10900
		10.60	3.70	2.80	21800
		10.30	2.70	3.60	17000
起重臂节 Jib section Auslegerelement	 ①	12.68	2.78	2.82	12500
	 ①	12.18	3.20	2.68	14300
	 ②	8.48	2.71	2.82	8600
	 ②	8.17	2.70	2.64	9100
	 ③	10.60	2.71	2.9	7600
	 ③	10.18	2.70	2.48	8700
	 ④	10.50	2.70	3.70	14800
	 ⑤	10.50	2.70	3.60	11300
	 ⑦	10.40	2.70	3.50	6800
	 ⑥	5.50	2.70	3.60	5200
载重小车 Trolley Laufkatze	 ⑧	7.50	2.80	5.10	4990
		3.90	3.30	2.70	2×5370

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
吊钩 Pulley block Hubflasche		4.82	0.80	3.19	4920
		2.34	0.48	2.29	2×2990
司机室 Cabin Kabine		2.60	1.80	2.40	1500
起升机构 Hoisting mechanism Hubwerk	 H200FC300-1600D	5.40	3.20	4.00	2×38100
变幅机构 Trolleying mechanism Katzfahrwerk	 T450FC70	3.40	2.05	1.50	5700
塔头 Tower head Turmspitze		4.50	3.00	6.30	38200
上支座总成 Upper support Drehrahmenoberteil	 SR6600	4.80	4.90	2.50	42600
下支座总成 Slewing support Drehrahmenunterteil	 S65P125	4.90	4.90	2.40	45600
	 S65P125	4.80	0.70	0.70	8×2400
	 S65P125	7.80	1.60	2.70	2×10000

运输单元 / Dimensions and weight / Abmessungen und Gewicht

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
引进系统 Mounting beam Einführungsträger	 6.5 m-M65P50	14.90	4.20	1.50	8300
爬升架 Climbing tower section Kletterturmstück		15.59	1.36	1.41	4×4760
		6.97	0.26	3.70	2×2500
		6.97	0.33	3.90	2×4720
	 6.5 m-TC65P120G	6.97	0.26	3.73	2×1970
		6.97	0.26	3.66	1×2082
		6.97	0.26	3.94	1×2040
		6.97	0.26	3.73	3×1970
顶升机构 Climbing mechanism Kletterwerk	 6.5 m-J65P120	6.12	0.40	2.17	2×5620
标准节 Tower section Turmstück	 6.5 m-X65G3035A 6.5 m-X65G3035RbA	6.30 6.30	1.30 1.30	0.80 0.80	4×2730 4×3150
	 6.5 m-X65G3035A	5.71	2.55	0.21	8×870
支腿 Fixing angles Verankerungsfuss	 TA65P125	3.12	0.83	0.83	4×1880