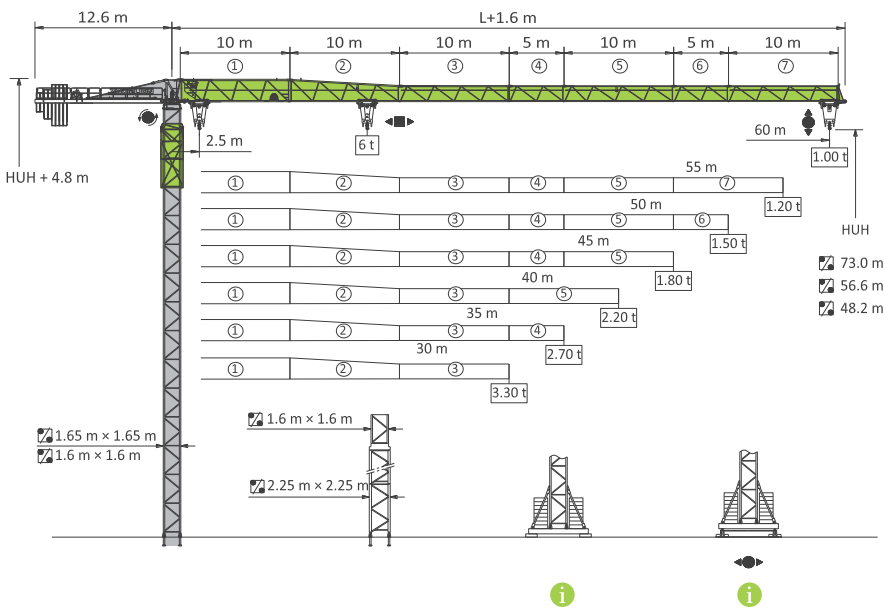
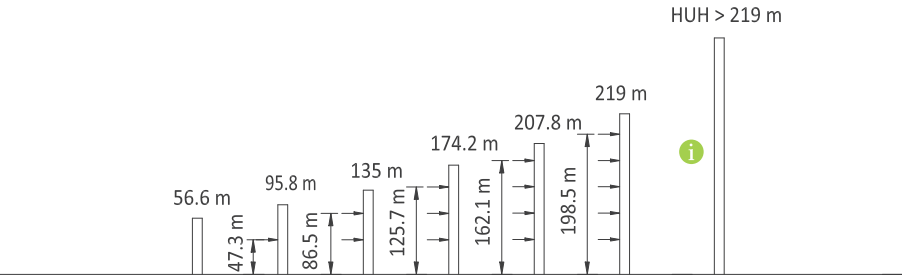
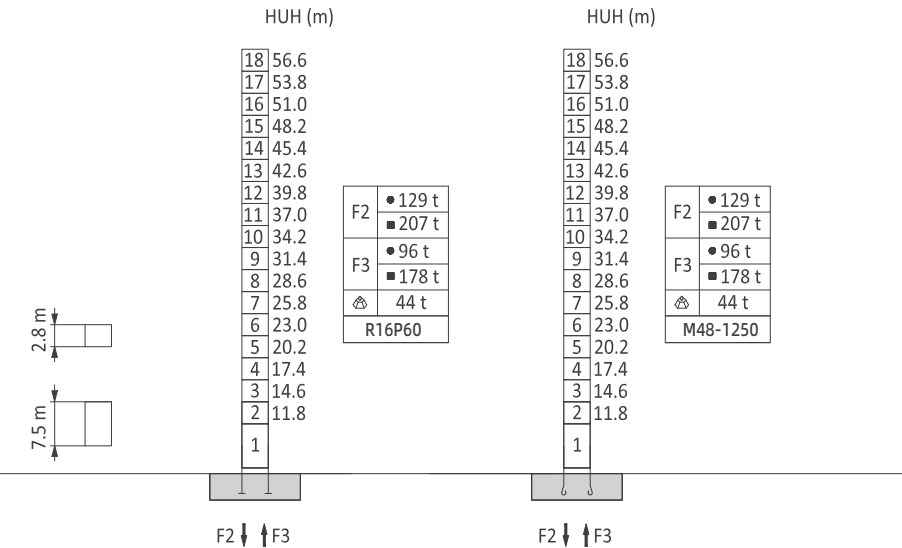


R90-6



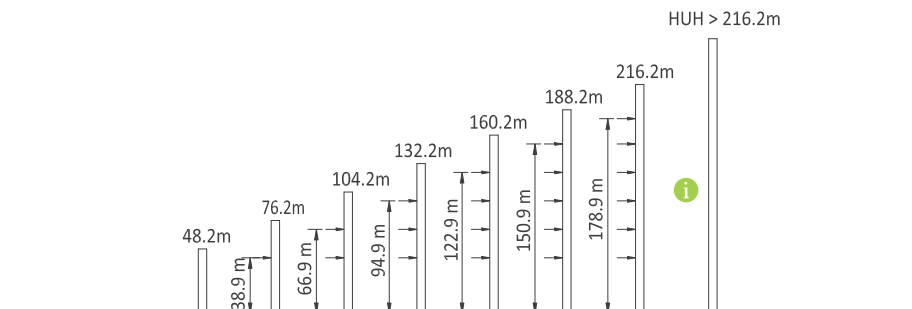
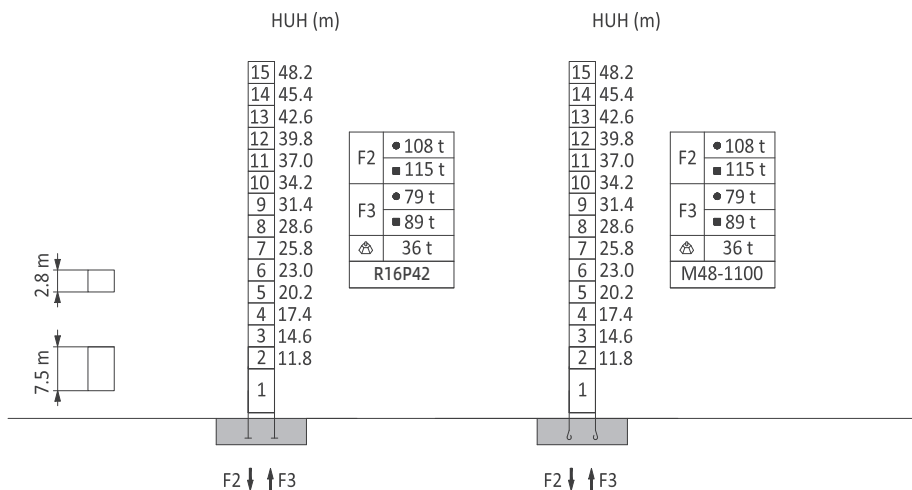
塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

 1.65m – RA R90-6RA



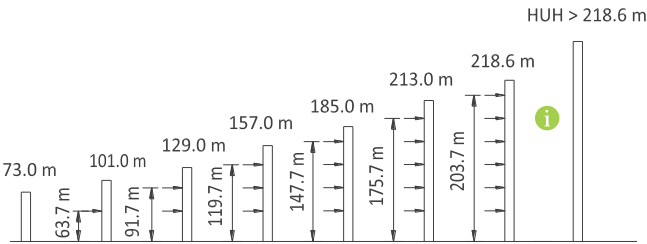
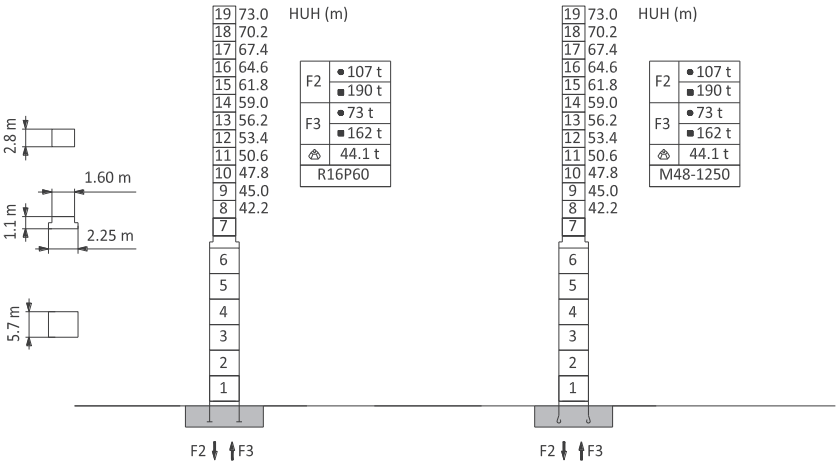
Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

1.6m – RC R90-6RC



塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

 1.6m – RC R90-6RCD





Load diagrams / Lastkurven / 起重性能

ΣΑΤΑΣ, m		m / t	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0
60.0		2.5-27.3/3.0	3.00	3.00	3.00	3.00	2.97	2.67	2.41	2.19	1.99	1.83	1.68	1.55	1.43	1.33	1.24	1.15	1.07	1.00
		2.5-15.2/6.0	5.07	4.32	3.75	3.29	2.92	2.61	2.35	2.13	1.94	1.77	1.63	1.50	1.38	1.28	1.18	1.10	1.02	0.95
55.0		2.5-28.1/3.0	3.00	3.00	3.00	3.00	3.00	2.76	2.49	2.27	2.07	1.90	1.75	1.61	1.49	1.39	1.29	1.20		
		2.5-15.6/6.0	5.23	4.46	3.87	3.40	3.02	2.70	2.44	2.21	2.01	1.84	1.69	1.56	1.44	1.33	1.23	1.15		
50.0		2.5-29.6/3.0	3.00	3.00	3.00	3.00	3.00	2.95	2.67	2.43	2.22	2.04	1.88	1.74	1.61	1.50				
		2.5-16.4/6.0	5.57	4.76	4.13	3.64	3.23	2.90	2.62	2.38	2.17	1.99	1.83	1.69	1.56	1.45				
45.0		2.5-30.3/3.0	3.00	3.00	3.00	3.00	3.00	3.00	2.75	2.51	2.29	2.11	1.95	1.80						
		2.5-16.8/6.0	5.73	4.89	4.25	3.75	3.33	2.99	2.70	2.45	2.24	2.05	1.89	1.75						
40.0		2.5-31.3/3.0	3.00	3.00	3.00	3.00	3.00	3.00	2.87	2.61	2.39	2.20								
		2.5-17.3/6.0	5.94	5.08	4.42	3.89	3.47	3.11	2.81	2.56	2.34	2.15								
35.0		2.5-32.2/3.0	3.00	3.00	3.00	3.00	3.00	3.00	2.96	2.70										
		2.5-17.8/6.0	6.00	5.24	4.56	4.02	3.58	3.21	2.91	2.65										
30.0		2.5-30.0/3.0	3.00	3.00	3.00	3.00	3.00	3.00												
		2.5-18.2/6.0	6.00	5.36	4.67	4.12	3.67	3.30												

Mechanisms / Antriebe / 传动机构

380 V (± 10 %) 50 Hz							kW	
	H25FC15-440	t	0.8	3	1.6	6	25	440 m
		m/min	100	40	50	20		
	S75C6A-150LB12/16A	r/min	0 - 0.8				7.5	
	T30FC60-b(D)	m/min	0 - 100				3.0	
			35.5 kW					





平衡重 / Counter-jib ballast / Gegenauslegerballast

高度 m	2.0t	1.3t	数量 (t)	PHZ2000Q	PHZ1300N
60.0	5	3	13.9		
55.0	5	2	12.6		
50.0	4	3	11.9		
45.0	4	2	10.6		
40.0	3	3	9.9		
35.0	3	2	8.6		
30.0	4	0	8.0		
				(mm)	(mm)




压重 / Central ballast / Zentralballast



Dimensions and weight / Abmessungen und Gewicht / 运输单元

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)	
平衡臂 Counter-jib Gegenausleger		11.83	1.24	0.58	2540	
起重臂节 Jib section Auslegerelement		①	10.19	0.98	2.40	1480
		②	10.18	0.98	2.23	940
		③	10.17	0.98	2.23	800
		⑤	10.15	0.98	1.60	590
		⑦	10.15	0.98	1.60	500
		④	5.20	0.98	1.60	350
		⑥	5.20	0.98	1.60	280
		⑧	0.87	0.98	1.60	80
载重小车 Trolley Laufkatze		2.03	1.67	0.90	280	
吊钩 Pulley block Hubflasche		0.93	0.36	1.54	280	
司机室 Cabin Kabine		2.08	1.30	2.16	480	
起升机构 Hoisting mechanism Hubwerk	 H25FC15-440	1.78	1.05	0.81	920	
变幅机构 Trolleying mechanism Katzfahwerk	 T30FC60-b(D)	1.01	0.73	0.57	350	
回转总成 Slewing assembly Drehteile		 1.65 m	1.61	1.61	3.26	3320
		 1.6 m	1.61	1.61	3.26	3300

运输单元 / Dimensions and weight / Abmessungen und Gewicht /

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		1.65 m - RARg	2.97	2.22	2.22	1310
		1.6 m - RCRg	2.94	2.22	2.22	1020
爬升架 Climbing tower section Kletterturmstück		1.6 m - TC16P60	6.64	2.33	2.14	2710
		1.65 m - TC16P42	6.58	2.13	2.13	2530
标准节 Tower section Turmstück		1.65 m - RA	2.97	1.65	1.65	1100
		1.6 m - RC	2.94	1.63	1.63	830
		2.25 m - RD	2.29	2.29	5.87	2290
		2.25 m - RDJZ	2.29	2.29	5.87	2560
		2.25 m - RDJ	5.87	2.56	2.56	2806
		1.65 m - RAJ 1.6 m - RCJ	7.67 7.64	1.95 1.90	1.95 1.90	3180 2440
标准节 Tower section Turmstück		1.65 m - RAJZ 1.6 m - RCJZ	7.67 7.64	1.65 1.63	1.65 1.63	2920 2290
		RD/RC	1.35	2.36	2.36	2740
支腿 Fixing angles Verankerungsfuss		R16P60	1.50	0.36	0.36	4×170
		R16P42	1.18	0.34	0.34	4×120