

ZOOMLION

LIGHT DUTY VEHICLE-MOUNTED BOOM LIFTS

ZV18T/ZV26T/ZV28T

HIGHLIGHTS

- ▶ Standard outrigger function that able to extend on one side to work or not extend/not fully extend to work, fit narrow working space
- ▶ 120/200kg dual capacity (ZV26T, ZV28T) for larger work range; No restriction within the load map, easy to operation (ZV18T)
- ▶ 1.8m large work platform (ZV26T, ZV28T) for larger work space
- ▶ Polygonal large cross-section boom with high strength for good boom stiffness and stable movement (ZV26T, ZV28T)
- ▶ Proportional multiway valve for accurate control and stable micro-movement, with remote control for gentle start or stop, limit in extreme area and less bumping
- ▶ Unique overload protection and tilting protection, with the frame anti-collision system for all-round protection
- ▶ Build-in boom piping, reliable and long lifespan
- ▶ Lubrication-free slider and bearing, easy to maintain

FEATURES

Standard Features

Outrigger extend on one side to work
Outrigger not extend to work (ZV26T, ZV28T, ZV30T)
Remote control
Telecommunication system
Strobe light
4.3 in color display
Auto-level platform
Cab cold or heat condition
Platform self-lock door
Load sensing system
Tilting protection system
Upper and lower interlock system
Soft-outrigger protection
Fault diagnosis system
Emergency lowering system
Emergency stop system

Accessories & Options

- ▶ 1.4×0.7m work platform (ZV26T, ZV28T, ZV30T)
- ▶ Large display in cab console
- ▶ Frame anti-collision system
- ▶ Remote monitoring



ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com


Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

ZOOMLION


Model	ZV18T	ZV26T	ZV28T
Size			
Max work height	18m	26m	28.0m
Max outreach	12.1m	17m	17.0m
Max outreach at the highest work height	2.6m	3.2m	3.54m
Max work height at max outreach	5.6m	5.34m	5.34m
A Stowed length	6.3m	6.425m	6.98m
B Stowed width	2.10m	2.3m	2.10m
C Stowed height	3.05m	3.09m	3.15 m
D Work platform height	1.4m	1.8m	1.8m
E Work platform width	0.7m	0.7m	0.7m
Performance			
Rated load	200kg	120/200kg	120/200kg
Turntable rotary	360°Continuous	360° Continuous	360° Continuous
Platform rotary	360°Continuous	360° Continuous	360° Continuous
Max wind speed	12.5m/s	12.5m/s	12.5m/s
Chassis and Power			
Chassis brand and type	Foton BJ1065VDIBA-R3	Foton 1068VDJDA- FRDA01	Foton BJ1065VDJD6-FP
Cab rudder	Right rudder	Right rudder	Right rudder
Wheelbase	3.36m	3.36m	3.36m
Tread	Front tread 1.59m Rear tread 1.615m	Front tread 1.73m Rear tread 1.8m	Front tread 1.675m Rear tread 1.638m
Engine rated power	110kw	110kw	96kw
Max torque of engine	400N.m	360N.m	310N.m
Emission standard	Euro VI	Euro III	Euro IV
Aux power	Emergency pump	Emergency pump	Emergency pump
Control voltage	24V	12V	12V
Driving			
Front overhang	1.11m	1.11m	1.11m
Rear overhang	1.83m	1.955m	2.51m
Approach angle	19°	19°	19°
Departure angle	13°	13°	13°
Operators in cab	3	3	3
Max driving speed	110km/h	108km/h	90km/h
Weight			
Machine weight	6000kg	6000kg	5600kg
Sales Country	Australia	Bangladesh / Malaysia	Bangladesh / Malaysia

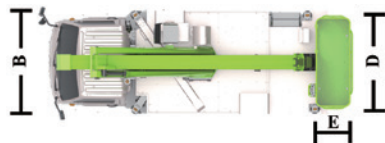

Range of Motion
ZV18T




Range of Motion
ZV21T



Range of Motion
ZV26T



Range of Motion
ZV28T



Range of Motion
ZV30T

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification. Product specifications are updated to May, 2026.