

ZOOMLION

VERTICAL MAST LIFT

ZMP06G

Complied with CSA/ANSI standard

HIGHLIGHTS

- ▶ Lightweight construction, enabling access through standard 1-ton passenger elevators.
- ▶ Standard large-diameter tires and collectable pothole plates, easy to pass the threshold.
- ▶ Front wheel driving and steering and small turning radius for flexible indoor movement.
- ▶ Permanent magnet synchronous traveling motor, energy-saving and high efficiency.
- ▶ Multi-arm synchronous lifting, fast and no impact.
- ▶ Compact dimensions, access to lifts, and ideal for indoor applications.
- ▶ Integrated hydraulic leak containment systems ensure easy operation and maintenance.

FEATURES

Standard Features

Autobrake system	Emergency stop button
Proportional control	Flashing beacon
All motion alarm	Active pothole protection system
Charging protection system	Horn
Self-closing entry gate	Load sensing system
Maintenance-free battery	Hour meter
Unidirectional extension platform	On-board diagnostic
Drivable at full height	Over tilt protective system
Emergency descent system	Forklift pockets


Accessories & Options

- ▶ Tool Tray
- ▶ AC power to platform
- ▶ GPS
- ▶ Ultrasonic Anti-Collision
- ▶ Mechanical Anti-Collision

ACCESS WITH ZOOMLION GREEN


Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

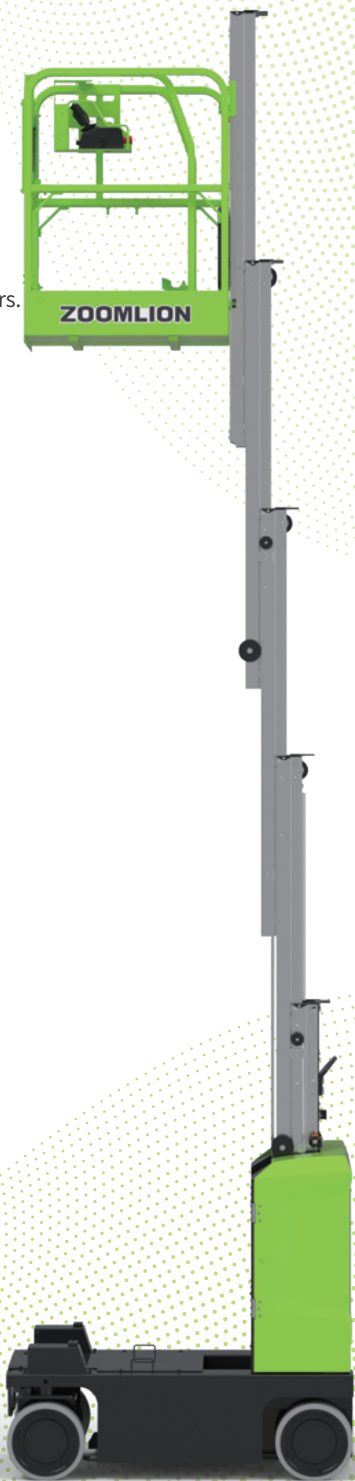

ZOOMLION

Model	ZMP06G	
	Imperial	Metric
Size		
Work Height	26ft 3in/22ft 3in	8m/6.8m
A - Platform Height-Elevated	19ft 8in/15ft 9in	6m/4.8m
B - Platform Height-Stowed	2ft	0.61m
C - Platform Length	2ft 10in	0.86m
D - Platform Width	2ft 6in	0.76m
K-Platform Extension	1ft 8in	0.5m
E - Overall Height	6ft 6in	1.99m
F - Overall Length	4ft 9in	1.45m
G - Overall Width	2ft 7in	0.8m
H - Wheelbase	3ft 8in	1.12m
I - Ground Clearance (Stowed)	2.6in	0.065m
J - Ground Clearance (Raised)	0.7in	0.017m
Performance		
Platform Capacity	350lb	160kg
Capacity on Deck Extension	250lb	113kg
Max. Number of Workers (indoor/outdoor)	1/1	1/1
Drive Speed (Stowed)	2.5mph	4.0km/h
Drive Speed (Raised)	0.31mph	0.5km/h
Turning Radius (Inside)	9in	0.23m
Turning Radius (Outside)	5ft	1.52m
Lifting Motor	24V/2.5KW	
Drive Motor	24V/2×0.6KW	
Up/Down Time	23/25s	
Gradeability	25% (14°)	
Max. Working Slope (Lateral/Vertical)	1.5°/3°	
Control	Proportional control	
Drive	Front wheels	
Brake	Front wheels	
Tire	Ø323mmx100mm	
Power		
Battery	4×6V/200Ah(C5)	
Charger	24V/30A	
Weight		
Gross	2160lb	980kg

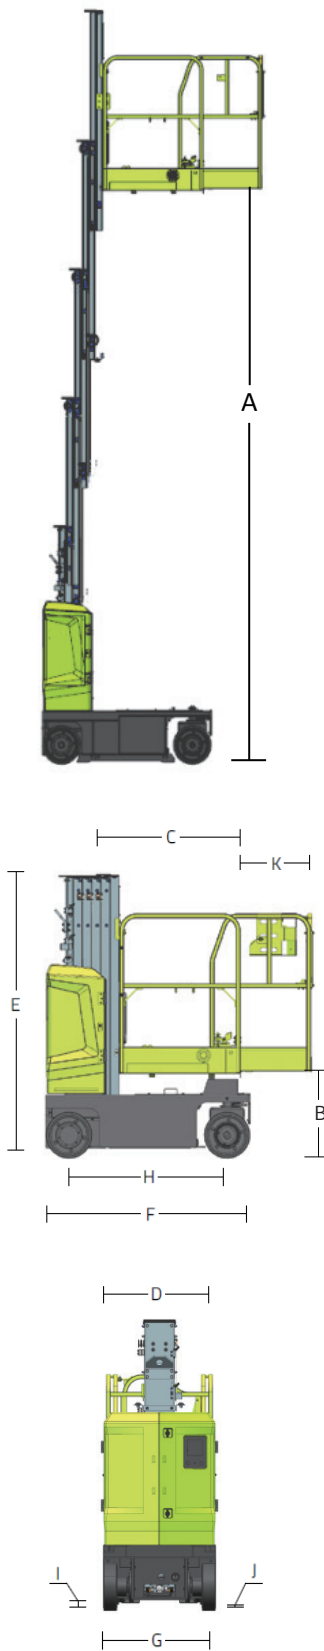

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to May, 2026.